



US006799864B2

(12) **United States Patent**
Bohler et al.

(10) **Patent No.:** **US 6,799,864 B2**
(45) **Date of Patent:** **Oct. 5, 2004**

(54) **HIGH POWER LED POWER PACK FOR
SPOT MODULE ILLUMINATION**

(75) Inventors: **Christopher L. Bohler**, North
Royalton, OH (US); **Anthony D.
Pollard**, Hartford (GB); **Greg E.
Burkholder**, Valley View, OH (US);
James T. Petroski, Parma, OH (US);
Mathew L. Sommers, Sagamore Hills,
OH (US); **Robert F. Karlicek, Jr.**,
Santa Maria, CA (US); **Stanton E.
Weaver, Jr.**, Northville, NY (US);
Charles A. Becker, Niskayuna, NY
(US)

(73) Assignee: **GELcore LLC**, Valley View, OH (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **10/063,924**

(22) Filed: **May 24, 2002**

(65) **Prior Publication Data**

US 2002/0176250 A1 Nov. 28, 2002

Related U.S. Application Data

(60) Provisional application No. 60/293,827, filed on May 26,
2001.

(51) **Int. Cl.⁷** **F21V 29/00**

(52) **U.S. Cl.** **362/236**; 362/294; 362/373;
362/800; 362/231

(58) **Field of Search** 362/310, 545,
362/555, 294, 373, 345, 800, 231, 236,
240; 372/36, 43; 361/697; 313/45; 165/104.33

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,275,874 A * 9/1966 Jannings 313/578

4,106,231 A *	8/1978	MacNiel	40/547
4,729,076 A *	3/1988	Masami et al.	362/235
4,733,335 A *	3/1988	Serizawa et al.	
4,784,258 A *	11/1988	Figari	206/5.1
4,875,057 A *	10/1989	Hediger et al.	347/242
5,029,335 A *	7/1991	Fisher et al.	372/36
5,036,248 A *	7/1991	McEwan et al.	313/500
5,168,537 A *	12/1992	Rajasekharan et al.	385/89
5,612,821 A *	3/1997	Schmutz	359/622
5,852,339 A *	12/1998	Hamilton et al.	313/11
6,160,596 A *	12/2000	Sylvester et al.	349/61
6,161,910 A *	12/2000	Reisenauer et al.	315/309
6,211,626 B1	4/2001	Lys et al.	
6,254,262 B1	7/2001	Crunk et al.	
6,367,949 B1 *	4/2002	Pederson	362/240
6,429,581 B1 *	8/2002	Trentelman	313/493
6,472,823 B2 *	10/2002	Yen	315/112

FOREIGN PATENT DOCUMENTS

DE	195 28 459 A1	2/1997
DE	20004105 U1 *	5/2000
EP	0 202 335 A	11/1986
JP	05218510	8/1993

* cited by examiner

Primary Examiner—Thomas M. Sember


Assistant Examiner—Hargobind Singh Sawhney

(74) *Attorney, Agent, or Firm*—Fay, Sharpe, Fagan,
Minnich & McKee, LLP

(57) **ABSTRACT**

A light module includes a light emitting diode assembly defining a front side light emitting diode array and a rear side. The rear side is in thermal communication with a thermally conductive spreader, and a thermally conductive core is in thermal communication with the conductive spreader. The thermally conductive core includes an electrical conductor in operative communication with the front side light emitting diode array, and a plurality of appendages disposed about the thermally conductive core such that they are in thermal communication with the conductive spreader.

19 Claims, 3 Drawing Sheets

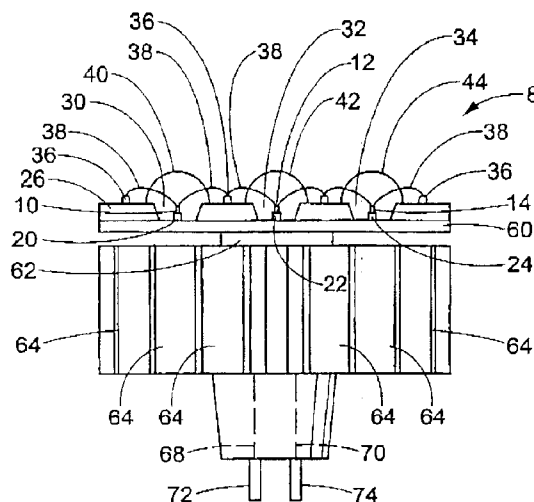

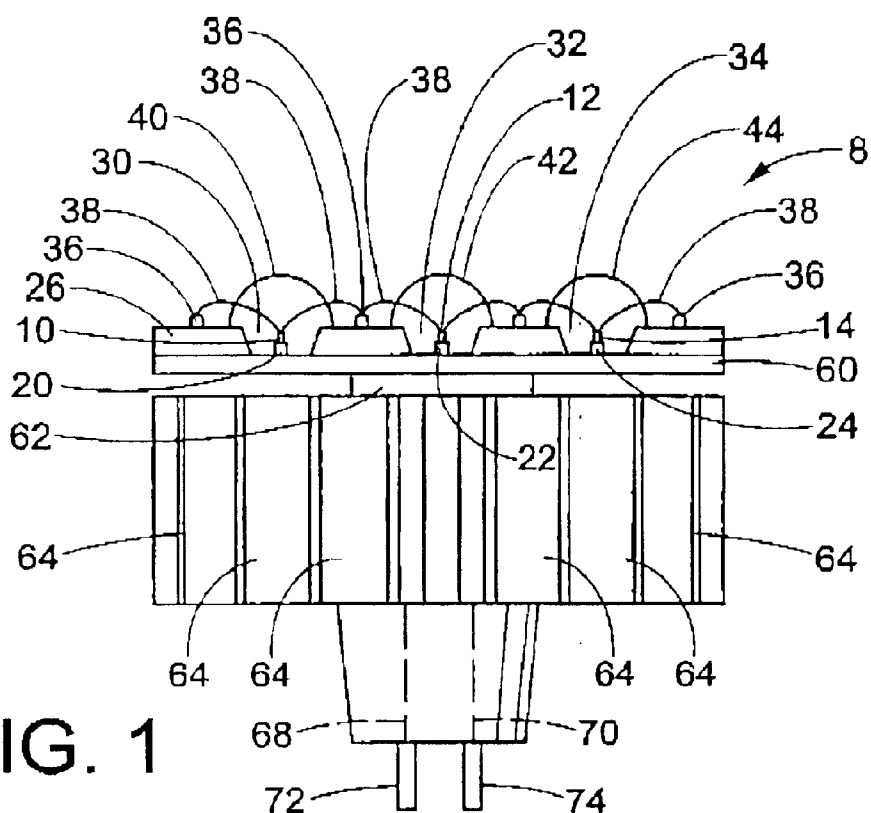


FIG. 1

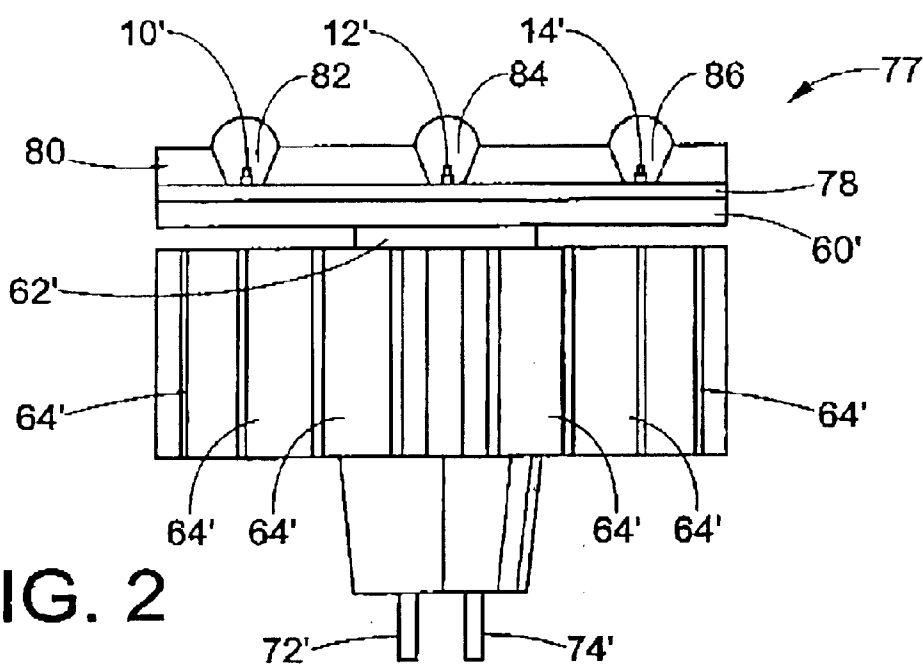


FIG. 2

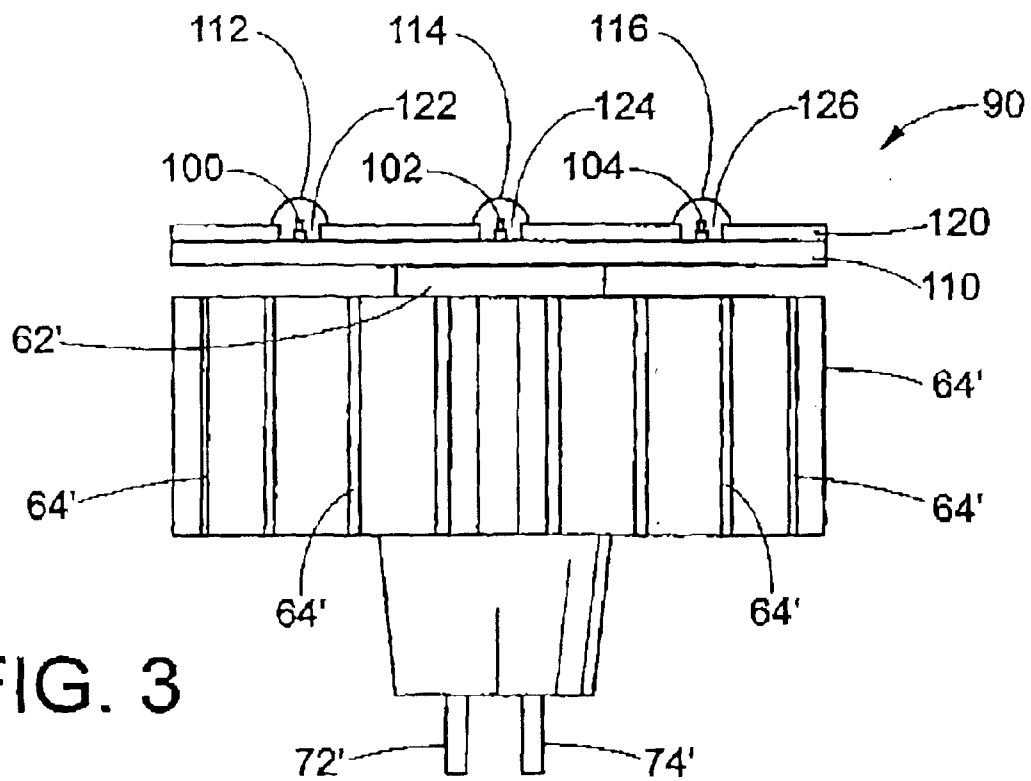


FIG. 3

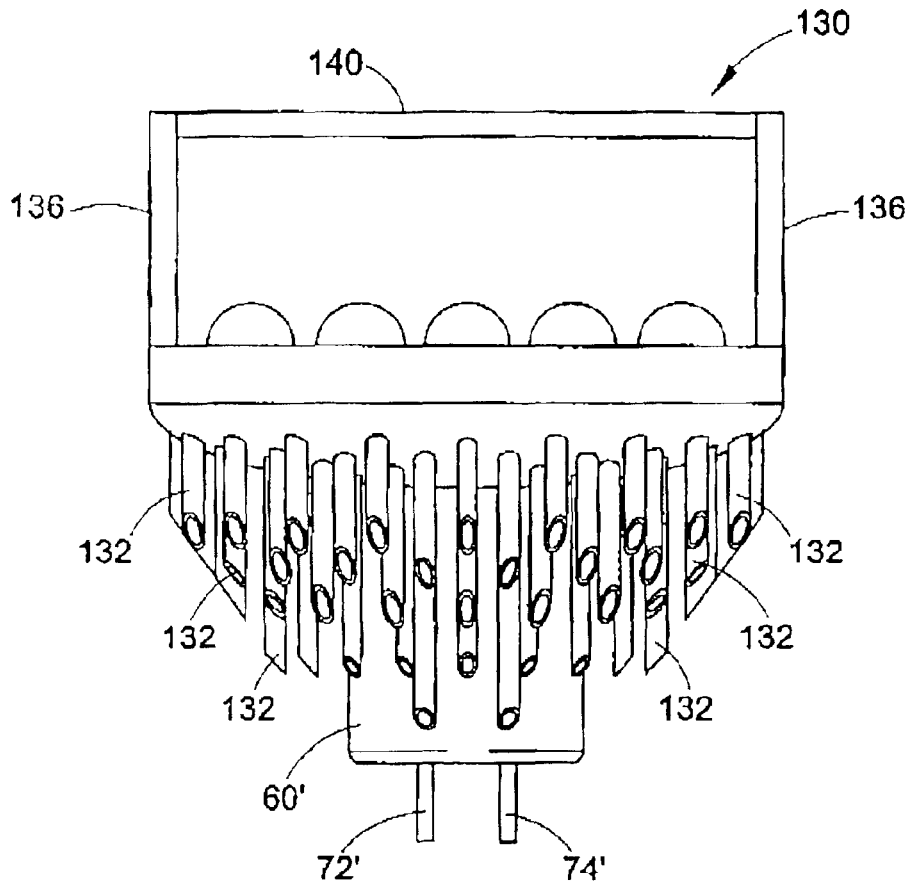


FIG. 4

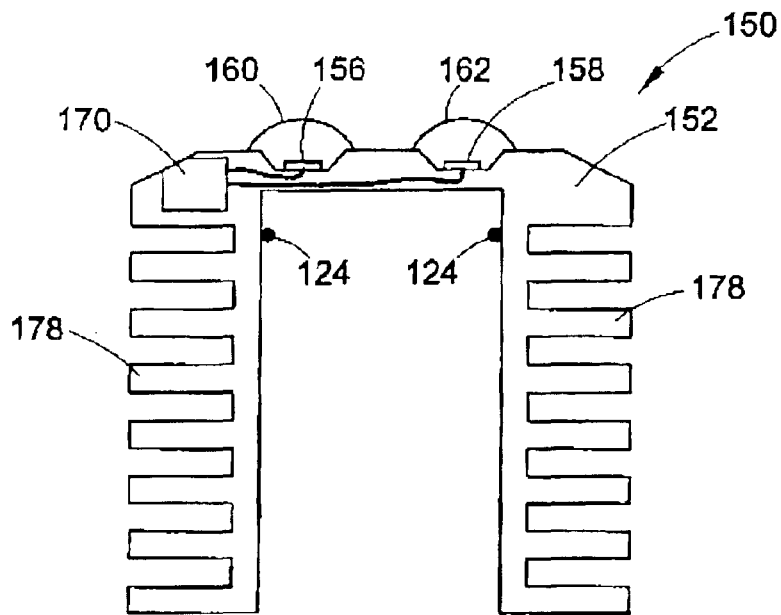


FIG. 5

1

HIGH POWER LED POWER PACK FOR SPOT MODULE ILLUMINATION

This application claims priority of U.S. Provisional Application No. 60/293,827 filed on May 26, 2001.

BACKGROUND OF INVENTION

The present invention relates generally to light emitting diode (LED) technology for lighting applications. It finds particular application in conjunction with spot module illumination applications and will be described with particular reference thereto. It will be appreciated, however, that the invention is also amenable to other like applications.

Current spot module lamp technology relies primarily on halogen-type lamps for miniature reflector (MR) and parabolic reflector (PAR) type lamp illumination. The use of halogen-type lamps for spot lighting, however, has some drawbacks. For example, excessive heating can limit the usage of these types of lamps for commercial and consumer applications. Existing LED solutions have utilized standard, off-the-shelf, epoxy encapsulated, through hole LED sources in the light source array. Such configurations severely limit the output intensity of the lamp. Therefore, the potential market penetration that may be realized, by LED technology is correspondingly limited.

Until now efforts in this technology area have been primarily focused on multi-color digital control of output light in order to provide "color wash" capabilities in various styles of packages. LED-based lamps have been designed to mimic the MR lamp footprint. However, because the LEDs used to construct these lamps are not thermally conductive, the thermal resistivity of such lamps being about 300° C./W, these LED lamps produce excessive heat. Therefore, thermal loading is a critical issue for conventional LED-based MR lamps.

One attempt at addressing the thermal issue has been to package surface mount devices onto a metal clad printed circuit board (PCB). However, this is merely a planar approach where the PCB is not directly integrated into a heat sink fixture included in the body of the lamp. Therefore, it has not been possible to incorporate high powered LED lamps into MR packages.

The present invention provides a new and improved apparatus and method which overcomes the above-referenced problems and others.

SUMMARY OF INVENTION

In accordance with one aspect of the present invention, a light module is provided. It includes a light emitting diode assembly defining a front side light emitting diode array and a rear side. The rear side is in thermal communication with a thermally conductive spreader, and a thermally conductive core is in thermal communication with the conductive spreader. The thermally conductive core includes an electrical conductor in operative communication with the front side light emitting diode array, and a plurality of appendages are disposed about the thermally conductive core such that they are in thermal communication with the conductive spreader.

In accordance with another aspect of the present invention, a light emitting diode assembly includes a light emitting face supported by a body through which electrical connection elements pass. The body includes a thermally conductive core in thermal communication with the light emitting face. The thermally conductive core includes the

2

electrical connection elements in electrical communication with light emitting diodes in the light emitting face. A plurality of thermally conductive attachments surround the thermally conductive core, and they are in thermal communication with the light emitting diode assembly.

In accordance with yet another aspect of the present invention, a lamp is provided for use in connection with spot module platforms. The lamp includes a plurality of LEDs arranged in an LED assembly having opposing forward and rearward facing sides. The forward facing side selectively provides illumination from the LEDs when power is supplied thereto. A heat sink is in thermal communication with the rearward facing side of the LED assembly, and it is arranged to draw heat from the LEDs. Heat dissipating means is in thermal communication with the heat sink, and it dissipates heat from the heat sink via convection.

One advantage of the present invention is that it will reduce the thermal resistivity of LED-based spot modules in MR or PAR-type lamps or other novel lamp configurations.

Another advantage of the present invention is that it makes possible the use of high powered LEDs within spot modules in MR or PAR-type lamps or other novel lamp configurations. The number of LEDs in the array may vary as desired for particular applications.

Another advantage of the present invention is that it produces an LED-based lamp that substantially mimics the footprint of conventional MR lamps. The same approach can also be used in the case of PAR-type lamps.

Another advantage of the present invention is that it produces brightness levels that surpass conventional clip-on filtered MR lamps.

Another advantage of the present invention is that either primary or a combination of primary and secondary lens configurations may be used to focus the light output to provide angular output from the spot module ranging from 10° to 65° full-width-half-maximum.

Another advantage of the present invention is that the operating temperature of the LED is reduced, thus increasing the operating lifetime of the LED based lamp.

Still further advantages of the present invention will become apparent to those of ordinary skill in the art upon reading and understanding the following detailed description of the preferred embodiments.

BRIEF DESCRIPTION OF DRAWINGS

The invention may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating a preferred embodiment and are not to be construed as limiting the invention.

FIG. 1 illustrates a first embodiment of a device suitable to practice the present invention.

FIG. 2 illustrates a second embodiment of a device suitable to practice the present invention.

FIG. 3 illustrates a third embodiment of a device suitable to practice the present invention.

FIG. 4 illustrates a fourth embodiment of a device suitable to practice the present invention.

FIG. 5 illustrates another embodiment of a device suitable to practice the present invention.

DETAILED DESCRIPTION

With reference to FIG. 7, a device 8 includes an integrated array of high power LEDs 10, 12, 14 mounted to respective

3

electrically insulative submounts **20, 22, 24**. The submounts **20, 22, 24** are secured to a metallic, rear side substrate **26** within respective wells **30, 32, 34**. Optionally, the LEDs **10, 12, 14** are directly secured to the metallic substrate **26**, thereby eliminating the use of submounts. The wells **30, 32, 34** in which the LEDs **10, 12, 14** reside are typically stamped or drilled directly into the substrate material to preferably form "reflector" shapes. However, other LED and well configurations are also contemplated. The submounts **20, 22, 24** (or optionally the LEDs **10, 12, 14**) are secured to the rear side substrate **26**, which acts as a heatsink, via a highly thermally conductive material (e.g., solder, filled epoxies, heat tape and/or other thermally advantageous adhesives). The LEDs **10, 12, 14** are connected to electrical contacts **36** via conductors **38**.

Lenses **40, 42, 44** cover the respective LEDs **10, 12, 14**. Optionally, a cap including a secondary optical lensing array is secured over the LEDs in the wells. In this case, the respective lenslets within the lensing array are mapped in a one-to-one relationship to the LEDs and the wells.

The substrate **26** is secured to a heat spreader **60**, which includes a thermally conductive material such as metal. During use, heat generated by the LEDs **10, 12, 14** is passed to the substrate **26** and then transferred to the heat spreader **60**. The heat is distributed relatively evenly across the spreader **60**. The spreader **60** is secured to a thermally conductive core **62**. Thermally conductive fins **64** surround and extend from the core **62**. In the illustrated embodiment, the fins **64** form an independent assembly that is interference fit with the core **62**. In one embodiment, a tight interference fit is ensured by shrinking the core **62** and expanding the fins **64** prior to assembly. More specifically, the core's outer diameter is temporarily shrunk by cooling (e.g., freezing) the core **62** and the inner diameter of the heatsink fins **64** is temporarily expanded by heating the fins **64**. Then, the fin assembly is slid or otherwise positioned around the core **62**. Once the parts return to an ambient temperature, a tight interference fit is created between the fin assembly and the core **62**. Because the fins **64** contact the core **62**, heat is conducted from the core to the external environment via the fins **64**. Alternately, the heat spreader **60** and finned heat sink **64** may be cast as a single piece of thermally conductive material. Electrical conductors **68, 70** pass through the core **62** and the heat spreader **60** to supply power received by pins **72, 74** to the LEDs **10, 12, 14**. Finned heat sink shapes other than the one shown are contemplated in order to increase the outer surface area for improved thermal management, as well as providing a more aesthetically pleasing look to the "lamp".

It is understood to those skilled in the art that the number of LEDs in the array may vary according to the lamp output desired.

FIGS. 2-5 illustrates alternate embodiments of the present invention. Components in these embodiments that correspond to the respective components of the embodiment illustrated in FIG. 1 are given the same numerical references followed by a primed (') symbol. New components are designated by new numerals.

With reference to FIG. 2, a device **77** includes a substantially flat substrate **78**, onto which the high power LEDs **10', 12', 14'** are mounted. A cover **80** is secured over the substrate **78**. The cover includes recesses **82, 84, 86** that map in a one-to-one relationship to the LEDs **10', 12', 14'**. The recesses **82, 84, 86** are shaped for forming respective reflectors (e.g., honeycomb shaped) that may be conic, parabolic or an alternately contoured shape to provide the desired light output beam pattern.

4

With reference to FIG. 3, another embodiment of the present invention includes a device **90** having a plurality of high power LEDs **100, 102, 104** mounted on a metallic slug (e.g., a heat spreader) **110**. Optionally, each of the LEDs is mounted to the slug **110** via an electrically insulated submount. In this embodiment, each of the LEDs **100, 102, 104** is individually packaged as a discrete unit. Furthermore, each of the packages includes a single primary optic (e.g., a lens) **112, 114, 116**. The packages are electrically connected utilizing a circuit board **120**. The circuit board **120** is designed for optimum thermal dissipation from the discrete package, such as with a metal core printed circuit board. Optionally, the board incorporates through holes **122, 124, 126** to allow direct connection of a heatsink included in the package to the slug **110**, which acts as a heatsink for the assembly. The LEDs **100, 102, 104** are secured to the slug **110** via a thermally conductive adhesive or solder (e.g., heat tape). Alternatively, the thermally conductive adhesive or solder secures the LEDs **100, 102, 104** to the respective submounts and, furthermore, secures the submounts to the slug **110**. A circuit (not shown) on the board **120** electrically connects the LEDs **100, 102, 104** to a power source. The circuit is preferably formed from standard metallic and ceramic materials; however, other materials are also contemplated.

With reference now to FIG. 4, an alternate embodiment of an LED module **130** includes a plurality of thermally conductive pillars or shaped protrusions **132** extending from a back side of the LED array as opposed to extending from the thermally conductive core as described above. It is now apparent to those skilled in the art that the location of the heat dissipating extensions or protrusions on the lighting module is variable and that other equally functional placements are possible. Moreover, extension or protrusion shape, physical continuity and material may also be varied for specific applications.

FIG. 4 also illustrates a housing **136**, made from plastic, metal or other material, attached around a periphery of the light emitting face. Opposite the LEDs, an optic **140** is attached to the housing **136**, preferably, by threads, snapping, clipping, screwing or the like. The optic **140** may be tinted as desired, or color matched to the underlying LEDs to provide a desired output color, or may be clear, and can be formed as a flat window, a lens or other optical adjusting system or beam shaper, a multiple fresnel optic system, a diffuser, or otherwise. Optionally, the optic **140** may comprise a lenticular plate or an array of lenslets having optical axes that align with the underlying LEDs. In any event, preferably, the optic **140** attaches to the housing **136** so that an assortment of different types thereof are readily interchangeable as desired to selectively tailor the module **130** for various applications. Additionally, the housing **136** is optionally height adjustable and/or interchangeable with an assortment of different height housings to select a desired distance between the optic **140** and the underlying LEDs. Artisans will appreciate that by having a variable separation between the LEDs and the optic **140** in this manner, lens of different focal lengths can be accommodated.

With reference to FIG. 5, an alternate fixture **150** includes a metallic substrate **152** or heat-dissipating fixture that doubles as a housing of a lamp assembly. Included are high power LEDs **156, 158** with corresponding lenses **160, 162**. Such a body **152** is preferably produced from aluminum or other thermally conductive materials in a suitably cast or machined shape. A circuit **170** for interconnecting the LEDs to a power source (not illustrated) may be directly patterned on the housing assembly or consist of a printed wiring board

5

affixed to the top surface of the housing. The circuit includes openings for the LEDs **156, 158** and optionally includes mechanical features for attaching the lenses **160, 162**. Electrical connection to the circuit **170** is made through contacts **174** in the central portion, which may be adapted to receive a power supply or leads from an off-device power supply. Alternately, electrical connection may be made through vias or holes in the housing. The hollow central portion of the housing additionally may be used to contain other electrical control circuitry for the LEDs **156, 158** and the bottom of the housing may be attached to a suitable connector design for connection to a socket. Heat dissipating fins **178** surround the exterior of the assembly. It is understood to those skilled in the art that the number and color of LEDs in the array in a single housing may vary according to the lamp output desired. Moreover, the number and arrangement of attached heat dissipating fins is variable as desired.

The mechanical designs disclosed in the devices of the present invention have thermal resistivities on the order of about 40° C./W or less (e.g., about 15° C./W). Furthermore, it is to be understood that the devices **8, 77, 90, 130, 150** may be designed to mimic the footprint of conventional lamps of the MR or PAR-type (e.g., MR-16 lamps).

Preferably, the high power LEDs used in the present invention produce saturated colors (e.g., green, blue, cyan, red, orange, yellow, or amber) and/or white light such that the respective lamps produce at least about 60 lumens of light. Multiple colors within an array are also envisioned.

Preferably, the lenses and lenslets of the present invention are of the refractive, diffractive or Fresnel lens variety and are designed to produce spot light beams ranging from about a 10° to about a 65° spread for use in spot light applications.

It is also contemplated that power conversion components be included within the devices **8, 77, 90, 130, 150** for converting alternating current (AC) inputs (e.g., 12 VAC, 120 VAC, or 220 VAC) to the direct current, low voltage power used to power the LEDs. Power conversion components for universal AC inputs are also contemplated.

It is also contemplated that the individual LEDs within the devices **8, 77, 90, 130, 150** be selectively operated. In this case, individual or group LED addressing can be accomplished either locally with suitable control circuitry located in the lamp assembly, or through communication means for selectively addressing the individual LEDs remotely.

The invention has been described with reference to the preferred embodiment. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

What is claimed is:

1. A light module, comprising:

a light emitting diode assembly including a generally planar front side light emitting diode array and a rear side, the rear side in thermal communication with a thermally conductive spreader;

a thermally conductive elongated core having a first end in thermal communication with the conductive spreader, the thermally conductive core being elongated in a direction transverse to the generally planar front side light emitting diode array to define a second end distal from the conductive spreader; and

a plurality of appendages, disposed around the thermally conductive core, the plurality of appendages in thermal communication with the conductive spreader, and extending away from the thermally conductive core.

6

2. The light module as set forth in claim 1, further comprising:

a housing surrounding the front side light emitting diode array; and

an optic removably affixed to the housing opposite the front side light emitting diode array.

3. The light module as set forth in claim 1, wherein the plurality of appendages comprises fins surroundingly attached to the thermally conductive core, said fins not contacting the thermally conductive spreader, said fins thermally conductively communicating with the thermally conductive spreader through the thermally conductive elongated core.

4. The light module as set forth in claim 1, wherein the light emitting diode assembly comprises a number of light emitting diodes, each light emitting diode disposed in a shaped recess, the recess and light emitting diode covered with a lens.

5. The light module as set forth in claim 1, wherein the light emitting diode assembly comprises individually packaged light emitting diode elements.

6. The light module as set forth in claim 5, wherein the individually packaged light emitting diode elements are secured in thermal communication to the thermally conductive spreader.

7. The light module as set forth in claim 1, wherein the light module has a thermal resistivity of less than 40 degrees Centigrade per watt.

8. The light module as set forth in claim 1, wherein the thermally conductive core has an electrical conduit passing from the first end to the second end to provide electrical access to the front side light emitting diode array from the second end of the thermally conductive elongated core, and a physical size and shape of an exterior of the thermally conductive elongated core and the electrical conductor are designed to be accommodated in a fixture selected from a group consisting of MR-style fixtures and PAR-style fixtures.

9. The light module as set forth in claim 1, wherein the front side light emitting diode array selectively produces saturated color light, the saturated color light being produced by the light emitting diodes emitting a narrow band light.

10. The light module as set forth in claim 1, wherein the front side light emitting diode array selectively produces white light.

11. The light module as set forth in claim 1, wherein the front side light emitting diode array selectively produces desaturated colors based on a mixture from a variety of saturated color LEDs.

12. The light module as set forth in claim 1, wherein the front side light emitting diode array selectively produces at least 50 lumens of light.

13. The light module as set forth in claim 1, further comprising individually powerable sets of diodes in the front side light emitting diode array.

14. A light emitting diode assembly including a light emitting face supported by a body through which electrical connection elements pass, the body comprising:

a thermally conductive elongated core in thermal communication with the light emitting face, the thermally conductive core providing a path for the electrical connection elements to be in electrical communication with light emitting diodes in the light emitting face; and

a plurality of thermally conductive elongated attachments surrounding the thermally conductive core, the plurality of attachments being in thermal communication with the light emitting diode assembly.

7

15. A lamp for use in connection with spot module platforms, said lamp comprising:

a plurality of LEDs arranged in an LED assembly having opposing forward and rearward facing sides, said forward facing side selectively providing illumination from the LEDs when power is supplied thereto;

a heat sink contacting the rearward facing side of the LED assembly to draw heat from the LEDs, the heat sink including:

(i) a thermally conductive base having a lateral area substantially coextensive with the rearward facing side of the LED assembly and in thermal contact with the rearward facing side of the LED assembly, and

(ii) an elongated thermally conductive core having a lateral area less than the lateral area of the rearward facing side and connecting with a central area of the thermally conductive base, the elongated thermally conductive core extending from the thermally con-

8

ductive base in a direction away from the LED assembly; and,

a heat dissipating structure including a plurality of heat-dissipating members each extending away from a connection of the heat-dissipating member with the heat sink, the heat dissipating structure connected with the elongated thermally conductive core.

16. The lamp according to claim **15**, wherein the LEDs are disposed in reflector wells.

17. The lamp according to claim **15**, wherein the saturated color light is produced by the LEDs emitting a narrow wavelength light.

18. The lamp according to claim **17**, wherein the desaturated color is produced by mixing the LEDs producing a variety of saturated colors.

19. The lamp according to claim **15**, wherein the heat dissipating structure is not connected with the thermally conductive base of the heat sink.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,799,864 B2
APPLICATION NO. : 10/063924
DATED : October 5, 2004
INVENTOR(S) : Christopher L. Bohler et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:


Col. 5, Line 62
Claim 1, Line 62, change "dode" to --diode--.

Col. 5, Line 64
Claim 1, Line 64, change "disposed around" to --surrounding--.

Col. 6, Line 66
Claim 2, Line 66, "FIG 7" should be --FIG 1--.

Signed and Sealed this

Thirteenth Day of February, 2007

A handwritten signature in black ink on a light gray dotted background. The signature is written in a cursive style and reads "Jon W. Dudas".

JON W. DUDAS
Director of the United States Patent and Trademark Office